

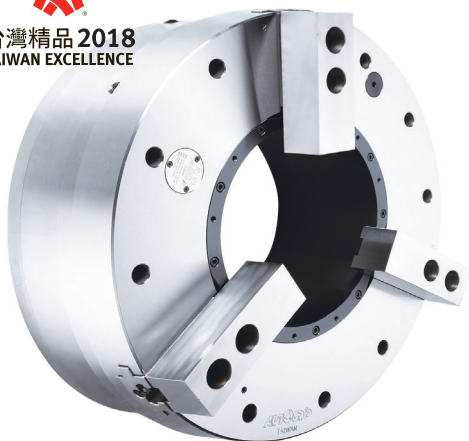


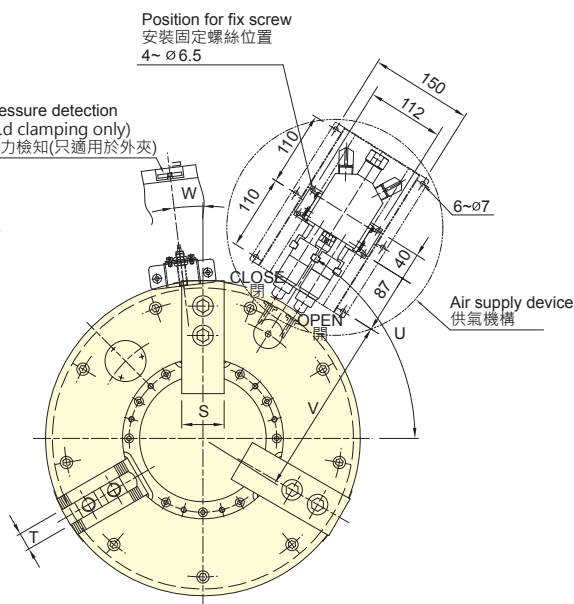

- 超大通孔徑氣動夾頭，內藏氣壓缸，適合管材加工。
- 夾頭內建有"壓力檢知"機構，能檢知夾頭內部壓力遽降，確保操作安全。
- 專利注氣系統，安裝快速容易，無傳統注氣密封環損壞問題，可節省安裝及維修成本。
- Large through-hole 3-jaw power chuck with build in air cylinder.
- With build-in "pressure detection" device in chuck which can check the pressure is lowered rapidly within the chuck, guarantee to the security of operating.
- Patented air supply system, it is easy to install and maintain. No abrasion issue of traditional sealed ring. Maintenance cost and time can be saved.

■ 專利產品字號 Patent numbers :
 德國 : 20.2011.101.818.4 / 20.2012.102.498.5(Germany)
 日本 : 3169457 / 3178706 (Japan) / 歐盟 : EP 2517822 B1 (EU)
 大陸 : ZL 2011 2 0141324.9 / ZL 2012 2 0274549.6 (China)
 台灣 : M440159 / M415011 (Taiwan) / 美國 : US8770222 B2 (U.S.A.)
 義大利 : 0000278076(Italy)

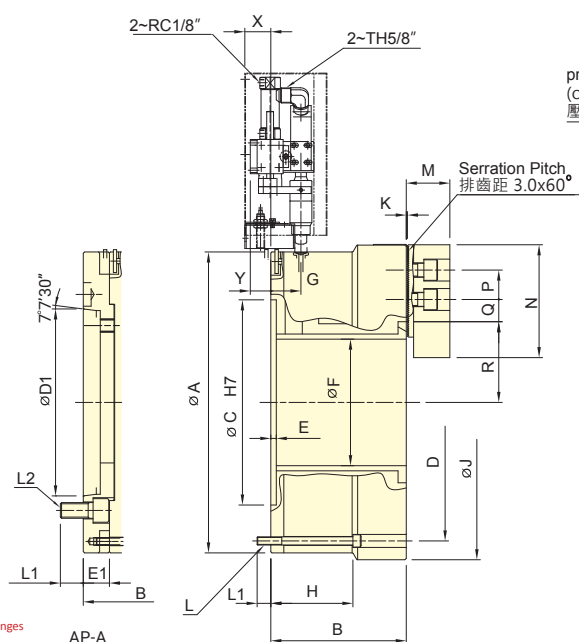

保留規格修改的權利
Subject to technical changes

技術規格 SPECIFICATIONS

型號		通孔徑	爪行程 (直徑)	夾持直徑 Chuckng Dia.		最大使用壓力	最大夾持力	最高迴轉數	I	重量	空氣消耗量 (使用壓力 6kgf/cm ²)	
Model		Thru-hole Dia.	Jaw stroke (Dia.)	最大 Max.	最小 Min.	Max. pressure	Max. Clamping force	Max. speed	Moment of inertia	Weight	Air Consumption	
		mm	mm	mm	mm	MPa (kgf/cm ²)	kN (kgf)	min ⁻¹ (r.p.m.)	kg·m ²	kg	lit(at 6kgf/cm ²)	
AP-145	A11	145	14	420	62	0.6(6.1)	85.0(8667)	1700	3.8	156	182	17.8
AP-185	A15	185	14	460	100	0.6(6.1)	110.0(11216)	1300	6.0	188	223	22
AP-230	A15	230	17	535	170	0.6(6.1)	125.0(12742)	1300	11.1	265	310	34
AP-275	A20	275	17	580	200	0.6(6.1)	140.0(14271)	1100	15.5	301	346	39
AP-320	A20	320	17	658	200	0.6(6.1)	184.0(18762)	1000	27.2	415	505	45
AP-375	A20	375	24	738	260	0.6(6.1)	188.0(19115)	850	44.2	530	545	55

外型尺寸 DIMENSIONS

Model	A	B		C	D	D1	E	E1	F	G	H	J	K	L	L1		
AP-145	A11	400	198	231	300	365	196.87	8	33	145	34	120	420	3.5	9~M12	20	31
AP-185	A15	460	198	238	300	405	285.78	8	40	185	44	120	460	3.5	9~M12	20	35
AP-230	A15	515	226	266	380	483	285.78	8	40	230	49	145	535	3.5	6~M16	24	35
AP-275	A20	560	232	272	380	528	412.78	8	40	275	52	152	580	3.5	6~M16	24	35
AP-320	A20	615	256	306	520	580	412.78	8	50	320	55	116.5	658	3.5	9~M16	25	33
AP-375	A20	690	272	322	520	650	412.78	8	50	375	55	127	738	3.5	9~M16	28	33

Model	L2	M	N	P	Q max.	Q min.	R max.	R min.	S	T	U	V	W	X	Y	
AP-145	A11	6~M20	63.7	165	43	53.5	23.5	98	91	62	25.5	57°	242	0°	38	20
AP-185	A15	6~M24	63.7	165	43	53.5	23.5	118	111	62	25.5	58°	272	7°	38	20
AP-230	A15	6~M24	71.7	180	60	48.5	18.5	145	136.5	64	25.5	30°	300	7°	33	15
AP-275	A20	6~M24	71.7	180	60	48.5	18.5	167.5	159	64	25.5	30°	322	7°	30	12
AP-320	A20	6~M24	81.5	210	60	60.5	24.5	190	181.5	74	30	52°	350	7°	27	9
AP-375	A20	6~M24	81.5	210	60	66.5	24.5	223.5	211.5	74	30	52°	387	7°	27	9

1. 紅色數據為 AP-A 型之尺寸 (The dimensions and the specifications of AP-A type are in red data.)